

## Remote Water Chiller

*Delicious, perfectly chilled drinking water.*

This is a stylish and unique water chiller that fits discretely under the kitchen sink!

- Provides perfectly chilled drinking water at 39 - 42°F (4 - 6°C)
- All stainless steel waterways for use with RO system
- White powder coated galvanized steel cabinet with light gray plastic fascia
- Easy to install with quick-connect fittings
- Four foot insulated power cord with NEMA 5-15
- Adjustable water temperature control
- One gallon per hour cooling capacity; stainless steel storage tank
- Air cooled; no cabinet venting required
- Includes four feet of 1/4" diameter tubing, two quick-connect fittings, wall mounting clips and screws, instruction manual
- NSF approved



## Features:

**Cabinet:** Powder coated galvanized steel cabinet with plastic front.

**Cold Water Refrigeration Unit:** Convection-cooled condenser. Internally spring mounted, hermetically sealed compressor with automatic overload protector. No lubrication needed. Refrigerant is controlled accurately by capillary tube. Air-cooled; designed to fit under a cabinet.

**Cold Water Thermostat:** Temperature is controlled by an adjustable thermostat with "OFF" position that is easily accessible on the front of the cabinet.


**Cold Water Reservoir:** Evaporator is made of copper tube on stainless steel water tank and both are encapsulated in insulation.

**Capacity:** 1 GPH cooling capacity.

**Electrical:** 115 volts, 60 Hz. Water cooler compressor hp 1/20. Insulated power cord with NEMA 5-15 polarized plug.

**Limited One Year Warranty:** One year on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample copy available upon request.

## Dimensional Data

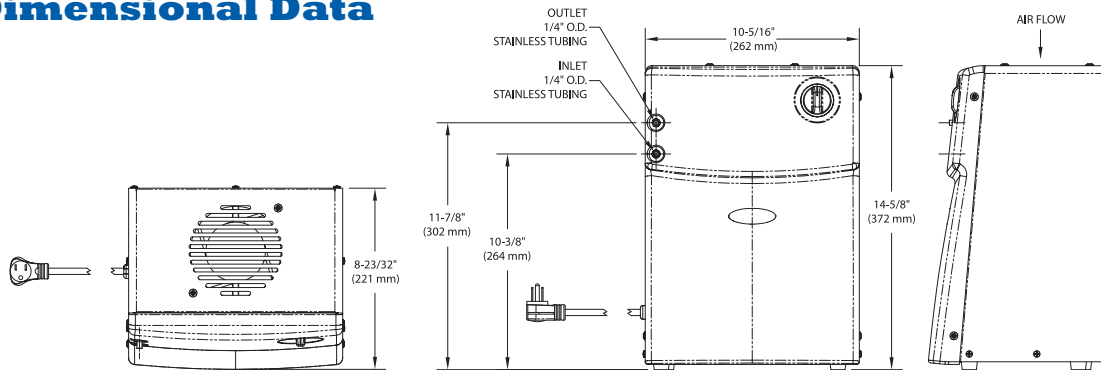

**NOTE:** For best performance, allow a 2" (51 mm) space around the side and the top. Do not put any objects on top of the chiller that could obstruct the fan.

## Remote Water Chiller Model and System Configurations

Petwa Item #	Model Description	Cooling Capacity <sup>1</sup> GPH (LPH)	115 volts, 60 Hz		Dimensions W x D x H Inches	Net Weight Lbs
			Full Load Amps	Rated Watts		
07-2878	R1P	1.0 (3.8)	1.3	135	10-5/16 x 8-3/4 x 14-5/8	30

<sup>1</sup>Capacity is at industry standard rating conditions of 50°F (10°C) outlet water, 80°F (26.7°C) inlet water and 90°F (32.2°C) ambient air.

- Model covered by this specification complies with all known Plumbing Codes. Listed by Underwriters Laboratories Inc.
- Components in this cooler are lead free as defined by the safe Drinking Water Act Amendments of 1986, and the Lead Contamination Control Act of 1988.
- Drinking water cooler is Certified to NSF/ANSI 61.
- All specifications subject to change without notice.



Certified to  
NSF / ANSI 61 / Section 9



Manufactured by Tri Palm International, LLC  
Cienega De Flores, Mexico



Unit 340, 2880 45th Ave. SE, Calgary, AB T2B 3M1  
265 Industrial Road, Cambridge, ON N3H 5N3

[www.petwa.ca](http://www.petwa.ca)