

NRV (Non-Regenerating Valve) Whole House Catalytic Carbon Filter

Economical Reduction of Chlorine, Chloramines and Other Bad Taste & Odors

Once water arrives safely at your home there is no further need for disinfectants. In fact they are undesirable! Disinfectants cause bad taste and odor, dry skin, damage plumbing, and can produce potentially harmful by-products.



Clean, Clear
Odor Free
Water



Features:

- Economical whole-house catalytic carbon filtration solution for reducing chloramines, chlorine and other bad tastes and odors. TOK models reduce chlorine plus hydrogen sulfide (H₂S) caused by sulphate reducing bacteria common in warmer climates.
- Includes factory installed one-piece bypass
- Time saving quick connect fittings (90° 3/4" NPT Elbows and 1" Straight NPT) included for faster, easier installation. Optional quick connect SharkBite® fittings also available.
- Five year warranty on Distribution Head.
- Ten Year Warranty on NSF Certified tank.

Options:


- Pressure tanks also available in Blue and Natural colours.

90° 3/4" NPT Elbows



Economical non-back-washing distribution head with convenient quick connect fittings

1" Straight NPT

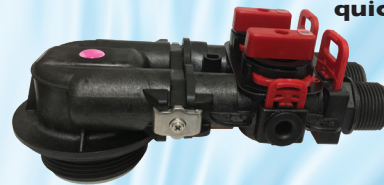

Specifications	NRV TO-100 Black Tank 15550952	NRV TO-150 Black Tank 15550953	NRV TO-200 Black Tank 15550954	NRV TO-250 Black Tank 15550956	NRV TOK-100 Natural Tank 15054093	NRV TOK-150 Natural Tank 15054094
Peak Flow Rates	4.0 gpm	5.0 gpm	7.0 gpm	8.0 gpm	4.0 gpm	5.0 gpm
Filter Media Volume - Cubic Feet	1.0 ft ³	1.5 ft ³	2.0 ft ³	2.5 ft ³	1.0 ft ³	1.5 ft ³
Filter Tank Size	9 x 48	10 x 54	12 x 52	13 x 54	9 x 48	10 x 54
Media Type	Catalytic Carbon	Catalytic Carbon	Catalytic Carbon	Catalytic Carbon	Catalytic Carbon With KDF Distributor	Catalytic Carbon With KDF Distributor
Media Loaded	Yes	Yes	Yes	No	Yes	Yes
KDF Protector	No	No	No	No	Yes	Yes
Tank Jacket	No	No	No	No	No	No
Shipping Weight	60 lbs	78 lbs	95 lbs	111 lbs	60 lbs	78 lbs
Plumbing Connections	Includes 3/4" 90° Elbows & 1" Straight NPT. Bypass Included					
Electrical Requirements	None					
Water Temperature	Min 39 - Max. 100 degrees Fahrenheit					
Water Pressure	Max. 125 psi					

The life expectancy of the carbon media bed in these units will be reduced as compared to a back washing style carbon filter. The actual media bed life will vary depending on water consumption, chlorine/chloramines concentration and flow rate. Exceeding the peak flow rate listed above will drastically reduce the life expectancy of the carbon media.



IAPMO R & T Certified
Against NSF/ANSI 42



A Division of



TOLL-FREE: 1-877-288-9888
www.petwa.ca

Your Local Water Treatment Professional